

www.Direct-Lighting.com Tel: (888)628-8166 Email: Service@Direct-Lighting.com PROJECT

CONTACT (NAME/TEL)

Rear Loading Gimbal Ring LED Track Lighting Kit HT-50004-3KIT



PACKAGE INCLUDED

- 1 x 44 inch track (#H-44)
- 3 x PAR20 LED Track Lighting Fixtures (#HT-50004 with PAR20 LED Bulbs)
- 1 x Floating Feed Canopy(**#HT-50090**) –**OR-** 1 x 18FT Plug-in Power Cord(**#HT-50088**)

PRODUCT DESCRIPTION

Rear loading gimbal ring led track lighting kit.

Fixture can be turned and tilted, track head be turned in 355° rotation and 90°± horizontal projecting.


#50004LED TRACK FIXTURE SPECIFICATIONS	
Item Number	50004-3KIT
Wattage / Voltage	8W (per head) / 120V
Bulb Type	LED PAR20, Comparable to a 50 watt halogen bulb
Beam Angle	25°
Color Temperature	3000K - Warm White / 4000K - Cool White
Finish	Available in Black (BK) or White(WH)
CRI	80 Each Light Bulb
Lumen	500 Each Light Bulb
Led Chip	COB (Chip-on-Board)
Compatible dimmers	Lutron DVCL-153P, MA-600, D-603P, MA-600/DV-600P
	-OR-
	Leviton 6631, 6161, 6681, 6633, IP106, TT106
Environment	Indoor, Dry Location
Average Life	25,000 Hours
Rating	UL &cUL Listed



www.Direct-Lighting.com Tel: (888)628-8166 Email: Service@Direct-Lighting.com PROJECT

CONTACT (NAME/TEL)

H System Single Circuit Track H-44

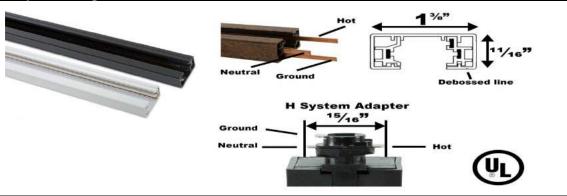


PRODUCT DESCRIPTIONS

- Basic 44-incht straight track, easy to install.
- Metal case to provide maximum support.
- Includes 1 matching color end cap and mounting hardware.

SPECIFICATIONS	
Description	H System Single Circuit Track
Voltage / Wattage	120V / 1800W
Ampere	20A
Construction	May be field cut and easy to install.
Environment	Indoor, Dry Location
Rating	UL & cUL Listed

Option 1 - #50090 FLOATING FEED CANOPY (POWER ENTRY)

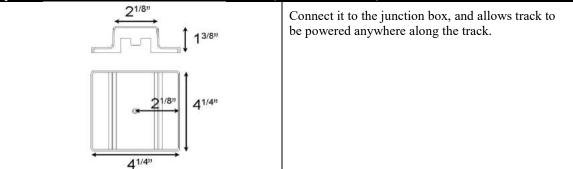

Option 2 - #50088 18FT CORD AND PLUG SET (POWER ENTRY)

