




<u>PROJECT</u>
<u>CONTACT (NAME/TEL)</u>

## Low Voltage Track Lighting Fixture 50016

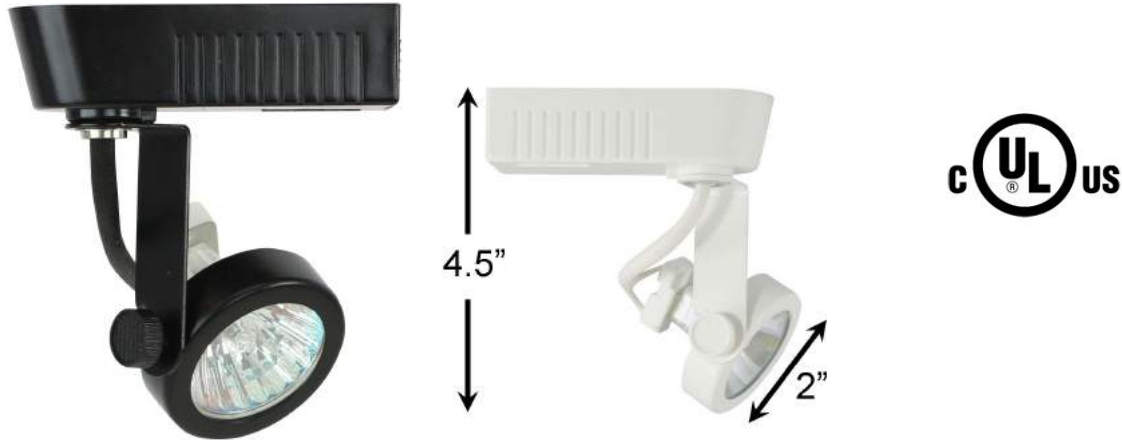

PRODUCT DESCRIPTION	
<ul style="list-style-type: none"> <li>• 350° horizontal rotation or 90° vertical projecting.</li> <li>• May be fitted with factory installed extensions.</li> </ul>	

SPECIFICATIONS	
<b>Description</b>	Low Voltage Track Lighting Fixture
<b>Wattage</b>	50W / 75W
<b>Voltage</b>	12V
<b>Light Bulb</b>	MR16 Halogen Lamp - Dimmable with ELV, electronic dimmer. MR16 LED Lamp (minimum of 7W or higher) – Do not use front glass if using LED bulb. Do not dim below 7 watts. Bulb Not Included. Please order separately.
<b>Accessories</b>	Clear front lens and holder clip included.
<b>Finish</b>	Black (BK), White (WH).
<b>Construction</b>	<ul style="list-style-type: none"> <li>• Die-cast aluminum track head with polycarbonate transformer case.</li> <li>• GU5.33 Bi-pin ceramic socket for MR16 lamp.</li> <li>• Fixture can be dim with 120V input electronic dimmer.</li> <li>• Integral electronic transformer build-in with the fixture.</li> </ul>
<b>Environment</b>	Indoor, Dry Location
<b>Rating</b>	UL &cUL Listed

Compatible Accessories – Order separately	
	Factory Installed Low Voltage Extension Wand. Available in 6", 12", 18", 24", 36", 48".

Ordering Information			
System	Model	Watt	Finish
HT*, HT2, JT	50016	50 / 75	WH / BK

\*"Pull-up" contact to up position for two-circuit application

Ordering Examples: HT-50016-WH, HT-50016/75W-WH, HT-50016-EX36-BK, JT-50016-BK  
 Product specification subject to change without notice.